

# Price 05 - 2016

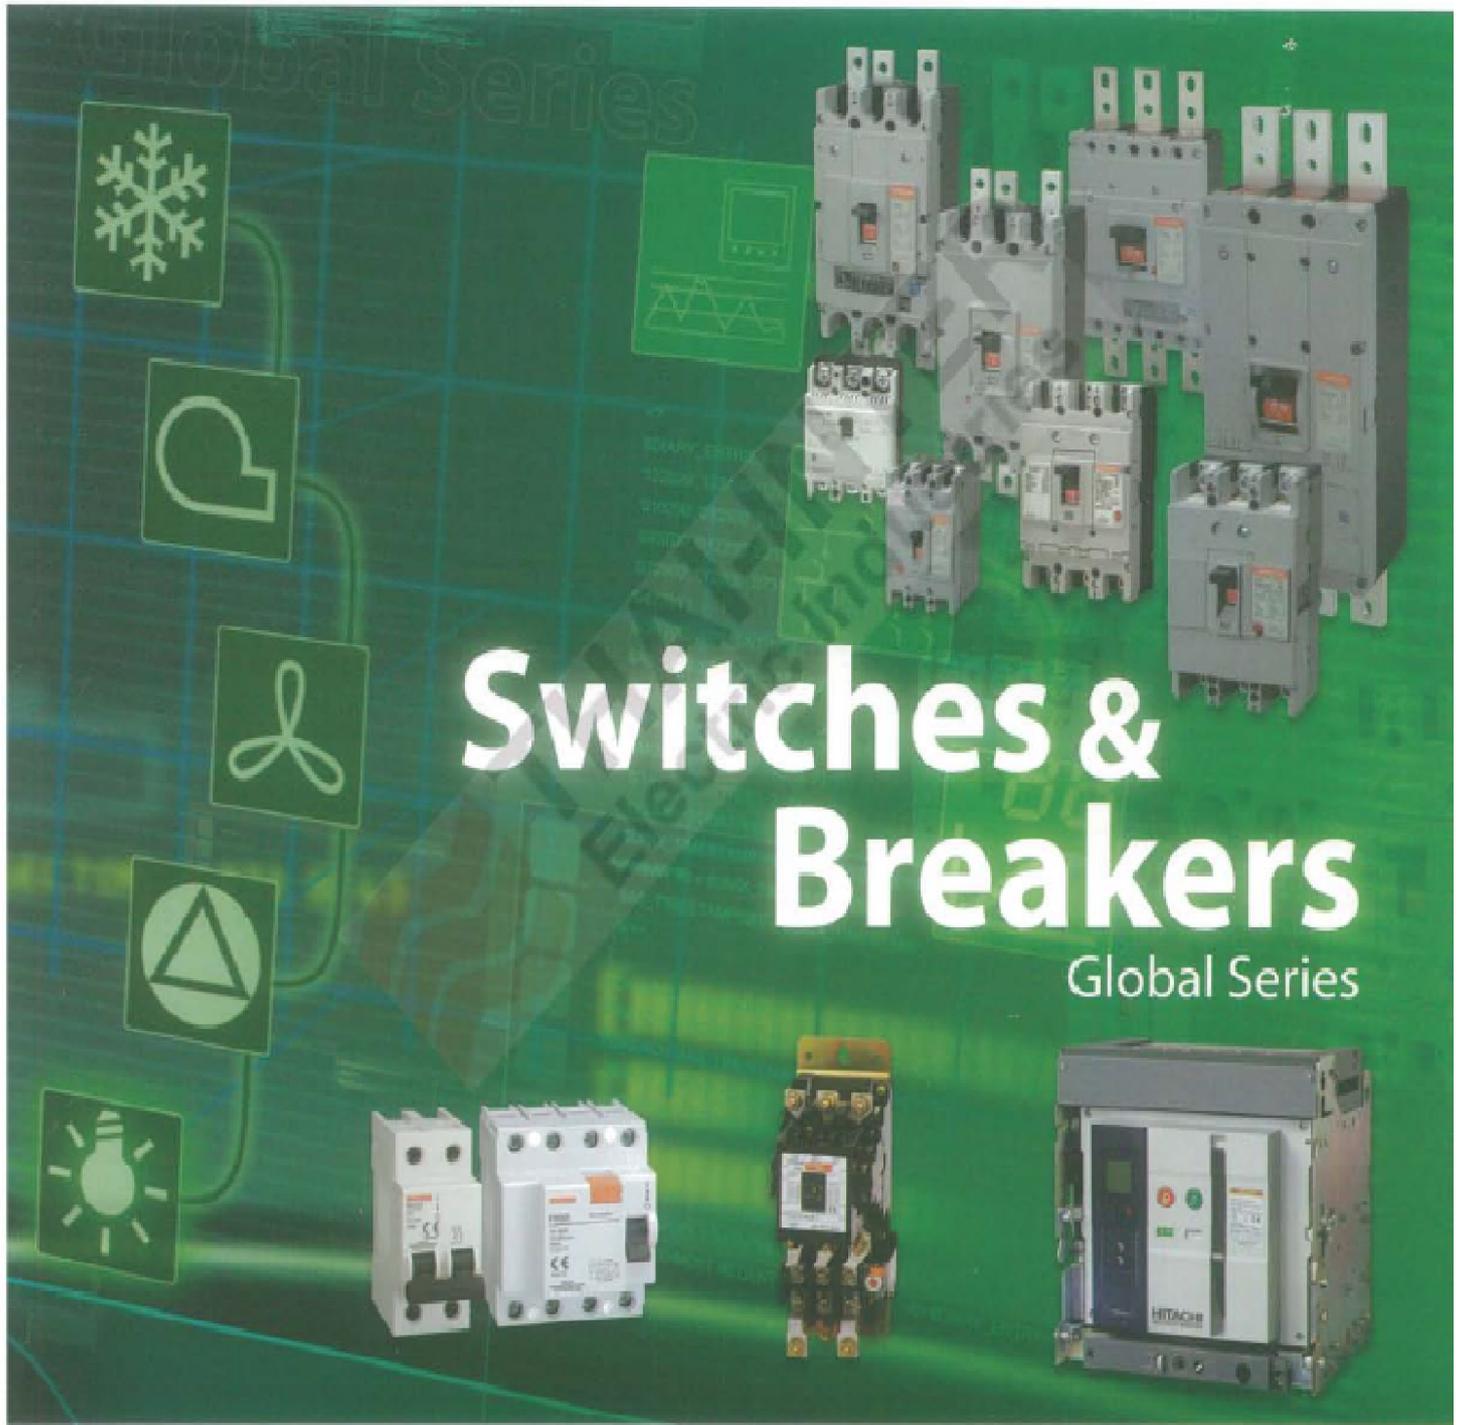
CÔNG TY TNHH THIẾT BỊ ĐIỆN MINH TRIỀU PHÁT

Website: [dailydienchinhang.com](http://dailydienchinhang.com)

Hotline: 093.24.26.729

Email: [dailydienchinhang@gmail.com](mailto:dailydienchinhang@gmail.com)

**HITACHI**  
Inspire the Next

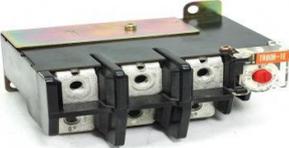
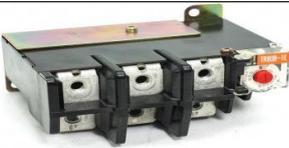


The advertisement features a green background with a grid pattern and several icons on the left side, including a snowflake, a speech bubble, a three-lobed shape, a triangle, and a lightbulb. In the center, the text "Switches & Breakers" is written in large white letters, with "Global Series" below it. The background also shows various Hitachi electrical components, including large grey circuit breakers and smaller white switches, arranged in a cluster. The Hitachi logo is visible on the bottom right component.

# Switches & Breakers

Global Series

## Thermal Overload Relay

Type		Setting Range Amp		Unit Price (vnd)
	TR12B-1E	0.16-0.24A	0.2A	330,000
		0.22-0.38A	0.3A	
		0.38-0.62A	0.5A	
		0.6-1.0A	0.8A	
		0.9-1.5A	1.2A	
		1.1-1.8A	1.4A	
		1.7-2.9A	2.4A	
		2.8-4.8A	3.8A	
		4-6A	5A	
		5-8A	6.8A	
		7-11A	9A	
		9-13A	11A	
	TR20B-1E	0.38-0.62A	0.5A	370,000
		0.6-1.0A	0.8A	
		0.9-1.5A	1.2A	
		1.1-1.8A	1.4A	
		1.7-2.9A	2.4A	
		2.8-4.4A	3.8A	
		4-6A	5A	
		5-8A	6.8A	
		7-11A	9A	
		9-13A	11A	
	TR25B-1E	16-24A	20A	400,000
		18-26A	22A	
	TR50B-1E	12-18A	15A	580,000
		16-24A	20A	
		24-34A	28A	
		32-48A	40A	
	TR80B-1E	45-65A	55A	800,000
		55-80A	67A	
	TR150B-1E	65-95A	80A	960,000
		90-120A	105A	
		110-150A	130A	

## 3 PHASE ELECTROMAGNETIC STARTER WITH THERMAL OVERLOAD RELAY

Type	Complete with Thermal Overload Model	Max Motor Capacity (kW) AC3 (IEC)		Rated Operation Current (A)		Auxiliary Contact		Unit Price (vnđ)
HS8	TR12B-1E	3.5	5.5	13	13	1	1	360,000
HS10		3.5	5.5	12	9	2	2	360,000
HS20	TR20B-1E	5.5	11	22	22	2	2	504,000
HS20		5.5	11	22	22	4	4	620,000
HS25	TR25B-1E	7.5	11	27	26	2	2	620,000
HS25		7.5	11	27	26	4	4	704,000
HS35	TR50B-1E	11	18.5	40	40	4	4	840,000
HS50		15	22	50	50	4	4	1,080,000
H65C	TR80B-1E	18.5	30	65	65	4	4	1,540,000
H80C		22	37	80	80	4	4	2,100,000
H100C	TR150B-1E	30	50	105	100	4	4	2,500,000
H125C		37	60	126	125	4	4	3,500,000
H150C		45	75	150	150	4	4	4,130,000
H200C	TR250B-1E	55	90	182	180	4	4	5,700,000
H250C		75	120	240	240	4	4	6,700,000
H300C	TR400B-1E	90	150	300	300	4	4	15,200,000
H400C		115	200	400	400	4	4	17,200,000
H600C	TR600B-1E	160	300	600	600	8	8	37,500,000
H800C		200(AC2)	400(AC2)	800	800	8	8	52,000,000



# HITACHI

Inspire the Next

## AIR CIRCUIT BREAKER (ACB)

Up to 6300A, ACB provides fully lined-up 3 frame.

For each frame, there is just one size, which is smaller and more compact.

It makes it possible for you to design the optimized volume panel.



ACB 3P Standard Specification for 3 Phase 3 Wire System.

Complete with: Trip relay Ammeter (L, I, S, DO) SHT 200-250V AC/DC

UVT Coil 200-250V AC/DC AUX 5A5B (off charge), Counter.

Model	IC at 400VAC (kA)	Unit Price (vnd)	Model	IC at 400VAC (kA)	Unit Price (vnd)
AKN-06D 3P 630A	65	59.600.000	AKN-06D 4P 630A	65	Please call
AKN-08D 3P 800A	65	56.000.000	AKN-08D 4P 800A	65	Please call
AKN-10D 3P 1000A	65	Please call	AKN-10D 4P 1000A	65	Please call
AKN-13D 3P 1250A	65	Please call	AKN-13D 4P 1250A	65	78,400,000
AKN-16D 3P 1600A	65	74.000.000	AKN-16D 4P 1600A	65	84,000,000
AKS-20E 3P 2000A	85	84.000.000	AKS-20E 4P 2000A	85	92,000,000
AKS-25E 3P 2500A	85	98.200.000	AKS-25E 4P 2500A	85	109,200,000
AKS-32E 3P 3200A	85	117.600.000	AKS-32E 4P 3200A	85	158,000,000
AKS-40E 3P 4000A	85	152.000.000	AKS-40E 4P 4000A	85	232,000,000
AKS-50F 3P 5000A	100	208.000.000	AKS-50F 4P 5000A	100	Please call
AKS-63G 3P 6300A	120	338.000.000	AKS-63G 4P 6300A	120	Please call

# HITACHI

Inspire the Next

## MOLDED-CASE CIRCUIT BREAKER (MCCB)

Economical (S-series)



Type	Pole	Rate Current (A)	Interrupting Capacity (kA)		Dimension			Price list
			230V	400V	W	H	D	
S-50SB	2	5, 10, 15 20, 30, 40, 50A	7.5	2.5	52	130	60	800,000
	3	5, 10, 15 20, 30, 40, 50A	7.5	2.5	75	130	60	1,000,000
S-60RB	2	5, 10, 15 20, 30, 40, 50A	7.5	5	52	130	60	1,010,000
	3	5, 10, 15 20, 30, 40, 50A	7.5	5	75	130	60	1,210,000
S-100EB	2	60, 75, 100A	10	10	52	130	60	1,240,000
	3	60, 75, 100A	10	10	75	130	60	1,540,000
S-100SB	2	60, 75, 100A	35	10	52	130	60	1,180,000
	3	60, 75, 100A	35	10	75	130	60	1,500,000
S-100EZ	3	60, 75, 100A	35	10	75	130	60	1,480,000
S-225SB	3	125, 150, 175, 200, 225A	35	15	105	165	60	2,620,000
SXK-225SB	3	125, 150, 175, 200, 225A	35	15	105	165	68	2,820,000
S-400S	3	250, 300, 350, 400A	50	25	140	257	103	5,400,000
SX-400	3	200~400A	50	36	140	257	103	6,200,000
S-600S	3	500, 600A	50	36	210	274	103	12,000,000
SX-600	3	300~600A	50	36	210	274	103	13,600,000
S-800S	3	700, 800A	85	36	210	274	103	15,200,000
SX-800	3	400~800A	85	36	210	274	103	16,300,000

## MOLDED-CASE CIRCUIT BREAKER (MCCB)

High Interrupting Capacity Breaker (L-Series)

Type	Pole	Rate Current (A)	Interrupting Capacity (kA)		Dimension			Price List (vnd)
			230V	400V	W	H	D	
L-50E	3	15,20,30,40,50A	175	125	90	150	103	5,000,000
L-100E	3	65,75,100A	175	125	90	150	103	6,000,000
L-225E	3	125,150,175,200,225A	175	125	185	257	103	6,400,000
L-400E	3	250,300,350,400A	175	125	140	257	103	7,800,000
L-600E	3	500,600A	175	125	210	274	103	17,600,000
L-800E	3	700,800A	175	125	210	274	103	28,400,000
L-225E	4	125,150,175,200,225A	175	125	140	257	103	9,300,000
L-400E	4	250,300,350,400A	175	125	185	257	103	11,800,000
L-600E	4	500,600A	175	125	280	274	103	26,200,000
L-800E	4	700,800A	175	125	280	274	103	42,600,000

# HITACHI

Inspire the Next



## MOLDED-CASE CIRCUIT BREAKER (MCCB)



### Standard ( F-Series)

Type	Pole	Rate Current (A)	Interrupting Capacity (kA)		Demension			Price List
			230V	400V	W	H	D	
F-30FB	2	3, 5, 10, 15, 20,30A	7.5	2.5	52	130	60	680,000
F-30FB	3	3, 5, 10, 15, 20,30A	7.5	2.5	75	130	60	980,000
F-50KB	3	5,10,15,20,30, 40,50A	100	50	90	150	86	2,300,000
F-60RB	2	5,10,15,20,30,40,50,60A	25	10	52	130	60	940,000
	3	5,10,15,20,30,40,50,60A	25	10	75	130	60	1,150,000
FXK-125S	3	5,10,15,20,30,40,50,60,75,100,125A	50	30	90	150	68	1,680,000
FXK-125H	3	5,10,15,20,30,40,50,60,75,100A	100	50	90	150	68	2,400,000
	3	125A	100	50	90	150	68	3,600,000
FXK-250S	3	125, 150, 200, 225A	50	30	105	165	68	4,000,000
	3	250A	50	30	105	165	68	5,200,000
FXK-250H	3	125, 150, 200, 225A	100	50	105	165	68	4,400,000
	3	250A	100	50	105	165	68	5,800,000
F-400R	3	200~400A	100	50	140	257	103	6,400,000
FX-400	3	500,600A	100	50	140	257	103	7,000,000
F-600F	3	300~600A	100	50	210	274	103	14,600,000
F-800R	3	700,800A	100	50	210	274	103	15,800,000
FX-800	3	400~800A	100	50	210	274	103	17,000,000
F-800RH	3	700,800A	125	85	210	274	103	20,000,000
F-1000C	3	1000A	125	85	210	410	150	38,600,000
FX-1000	3	500~1000A	125	85	210	410	150	38,600,000
F-1200C	3	1200A	125	85	210	410	150	43,800,000
FX-1200	3	600~1200A	125	85	210	410	150	43,800,000
F-1600E	3	1600A	125	85	210	370	140	76,200,000
F-50KB	4	5,10,15,20,30, 40,50A		50	120	150	86	3,820,000
F-400R	4	250,300,350,400A		50	185	257	103	9,600,000
F-600F	4	500,600A		50	280	274	103	21,000,000
F-800R	4	700,800A		50	280	274	103	27,000,000
F-800RH	4	700,800A		85	280	274	103	30,000,000

## MINIATURE CIRCUIT BREAKER (MCB)

Type	Pole	Rated Current (A)	Price List (vnd)
 <p><b>BK63</b> Breaking Capacity 6kA @ 230/400VAV type C</p>	1	6, 10, 16, 20, 25, 32, 40A	72,000
		50, 63A	78,000
	2	6, 10, 16, 20, 25, 32, 40A	148,000
		50, 63A	180,000
	3	6, 10, 16, 20, 25, 32, 40A	280,000
		50, 63A	300,000
	4	6, 10, 16, 20, 25, 32, 40A	470,000
		50, 63A	540,000
 <p><b>BTK63</b> Breaking Capacity 10kA @240/415VAC type C</p>	1	6, 10, 16, 20, 25, 32, 40A	130,000
		50, 63A	160,000
	2	6, 10, 16, 20, 25, 32, 40A	290,000
		50, 63A	330,000
	3	6, 10, 16, 20, 25, 32, 40A	500,000
		50, 63A	560,000
	4	6, 10, 16, 20, 25, 32, 40A	740,000
		50, 63A	850,000

### GHI CHÚ:

- Price list chưa bao gồm VAT (10%).
- Bảo hành 12 tháng.

## RESIDUAL CURRENT CIRCUIT BREAKER (RCCB)



**RCCB 2P**



**RCCB 4P**

Type	Rated Current (A)	Pole	Price List (vnđ)
BK-63	25, 32, 40A	2	680,000
BK-63	63A	2	890,000
BK-63	25, 62, 40A	4	990,000
BK-63	63A	4	1,240,000

### **GHI CHÚ:**

- Price list chưa bao gồm VAT (10%).
- Bảo hành 12 tháng.

**CÔNG TY TNHH THIẾT BỊ ĐIỆN MINH TRIỀU PHÁT**

**Website: [dailydienchinhhang.com](http://dailydienchinhhang.com)**

**Hotline: 093.24.26.729**

**Email: [dailydienchinhhang@gmail.com](mailto:dailydienchinhhang@gmail.com)**